



Low Profile Deckover Trailers

8.5 x 16	8.5 x 18	8.5 x 20	8.5 x 15 + 3	8.5 x 17 + 3
7,000 Lbs.	7,000 Lbs.	7,000 Lbs.	7,000 Lbs.	7,000 Lbs.
10,000 Lbs.*	10,000 Lbs.*	10,000 Lbs.*	10,000 Lbs.*	10,000 Lbs.*

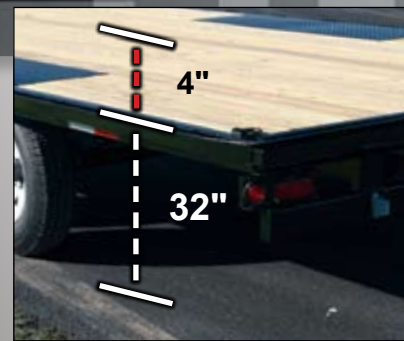

32 in. Deck Height
– Other deckovers are much higher.

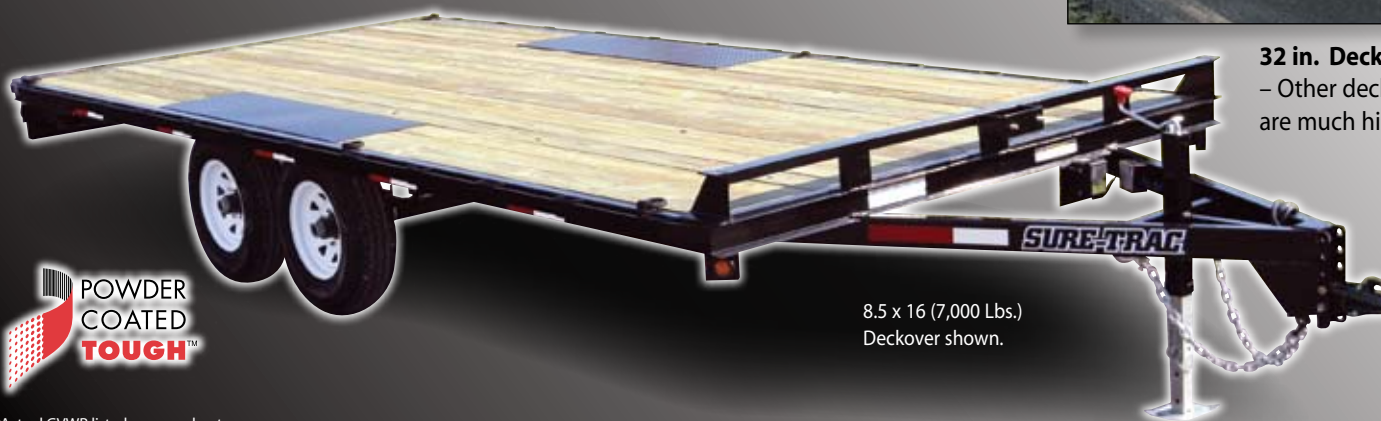

8.5 x 16 (7,000 Lbs.)
Deckover shown.



*Actual GVWR listed on spec sheet.

Sure-Trac Low Profile Deckover Trailers – Our trailers are built with incredible attention to detail and craftsmanship, and designed for a lifetime of hard work. Our tube frame design helps to stabilize the trailer, transferring extreme loads evenly, preventing frame twist and trailer failure. Our 32-inch low profile deck height provides better versatility and ease of use.

Check out these other great features:

- Pressure Treated Decking
- Bumper Pull and Gooseneck Option Available
- Powder Coat Finish
- True-Trac[™] Alignment
- New Tires, Wheels & Axles
- Quality Crafted in Indiana
- Superior Customer Service
- Same Day Parts Shipping



DOT Approved SEALED Lights and Conspicuity Tape



Heavy Duty Ramps – Rugged 8 ft. fabricated ramps fit neatly under the deck.



5K Lbs. D-Ring Tie Downs – Comes standard with Six Heavy Duty D-rings.



Stake Pockets & Rub Rail
– Heavy duty design provides expandability and protection on side loading jobs.



Spare Tire Holder – Securely attach a spare tire to the front of the trailer.



Full Seam Welds – All frame cuts welded front and back for maximum performance and longevity.



Mesh Open Tool Storage
– Optional on all sizes.



HD Frame-Mounted Jack and 2-5/16 Adjustable Coupler – Standard

LOW PROFILE DECKOVER TRAILER SPECIFICATIONS

	8.5 x 16	8.5 x 16	8.5 x 18	8.5 x 18	8.5 x 20	8.5 x 20	8.5 x 15 + 3	8.5 x 15 + 3	8.5 x 17 + 3	8.5 x 17 + 3
GVWR (Lbs.)	7000	9990	7000	9990	7000	9990	7000	9990	7000	9990
GAWR (Lbs/Axle)	3500	5000	3500	5000	3500	5000	3500	5000	3500	5000
Curb Weight	2290	2390	2490	2590	2690	2790	2590	2690	2790	2890
Payload	4710	7600	4510	7400	4310	7200	4410	7300	4210	7100
Max Hitch Wt.	700	1000	700	1000	700	1000	700	1000	700	1000
Main Frame	4 x 2 Tubing									
Crossmembers	2 x 2 Tubing									
Side Rail	4 x 2 Tubing									
Tongue	4 x 2 Tubing									
Beaver Tail	N/A						Wood Beaver tail			
Coupler	2-5/16 Adjustable Coupler									
Jack	Set Back, Top Wind, 7000#									
Axles	Cambered Brake and Idler	Cambered Brake Both Axles	Cambered Brake and Idler	Cambered Brake Both Axles	Cambered Brake and Idler	Cambered Brake Both Axles	Cambered Brake and Idler	Cambered Brake Both Axles	Cambered Brake and Idler	Cambered Brake Both Axles
	Greaseable Hubs on Both Axles									
Suspension	Double Eye Leaf Spring									
Tires	205/75 D15 LRC	225/75 D15 LRD	205/75 D15 LRC	225/75 D15 LRD	205/75 D15 LRC	225/75 D15 LRD	205/75 D15 LRC	225/75 D15 LRD	205/75 D15 LRC	225/75 D15 LRD
Wheel Size	15 in. 5 on 4.5	15 in. 6 on 5.5	15 in. 5 on 4.5	15 in. 6 on 5.5	15 in. 5 on 4.5	15 in. 6 on 5.5	15 in. 5 on 4.5	15 in. 6 on 5.5	15 in. 5 on 4.5	15 in. 6 on 5.5
Wheels	White, Spoke or Modular									
Floor	2" Pressure Treated Pine									
Lights	Sealed Recessed DOT Lighting, Side Markers, Stop, Turn, Tail, Marking, Clearance and Conspicuity Tape									
Electric Plug	7 Way Round									
Finish	Powder Coated High Gloss Black									
Overall Length	20.5'		22.5'		24.5'		22.5'		24.5'	
Deck Height	32"									
Coupler Height	19" - 27" Adjustable Coupler									
Ramps	8 ft. Fabricated Ramps						5 ft., 3 in. C-Channel, Standup			
OPTIONS										
	8.5 x 16	8.5 x 16	8.5 x 18	8.5 x 18	8.5 x 20	8.5 x 20	8.5 x 15 + 3	8.5 x 15 + 3	8.5 x 17 + 3	8.5 x 17 + 3
Tire Upgrades	Radial									
Decking	2" Oak Decking									
Spare Tire	Matching Tire & Rim									
Suspension	Slipper Spring Suspension, Torsion Axle									
Jack	Center Mounted 12 K Binkley Drop Leg									
Body Options	Gooseneck									
	Mesh Tool Basket Built into Tongue									
Ramps	N/A						Landscape Gate			

Table Units: Weights in Lbs., Dimensions as marked. Specifications subject to change without notice.