

Low Profile Skid Steer Trailers

7 X 14
10,000 Lbs.*
12,000 Lbs.
14,000 Lbs.

7 X 16
10,000 Lbs.*
12,000 Lbs.
14,000 Lbs.

7 X 18
10,000 Lbs.*
12,000 Lbs.
14,000 Lbs.

7 X 20
10,000 Lbs.*
12,000 Lbs.
14,000 Lbs.

Flat Base Ramps - Asphalt friendly design features unique flat base, 3" C-channel construction and support foot.

POWDER
COATED
TOUGH[™]


Shown in optional red (black is standard).

- Sure-Trac
- Other Trailers

Sure-Trac 5 ft. Ultra Low Profile
Other 4 ft. Ramps 20% Steeper



5 ft. HD Ramps Provide The Lowest Angle Available.

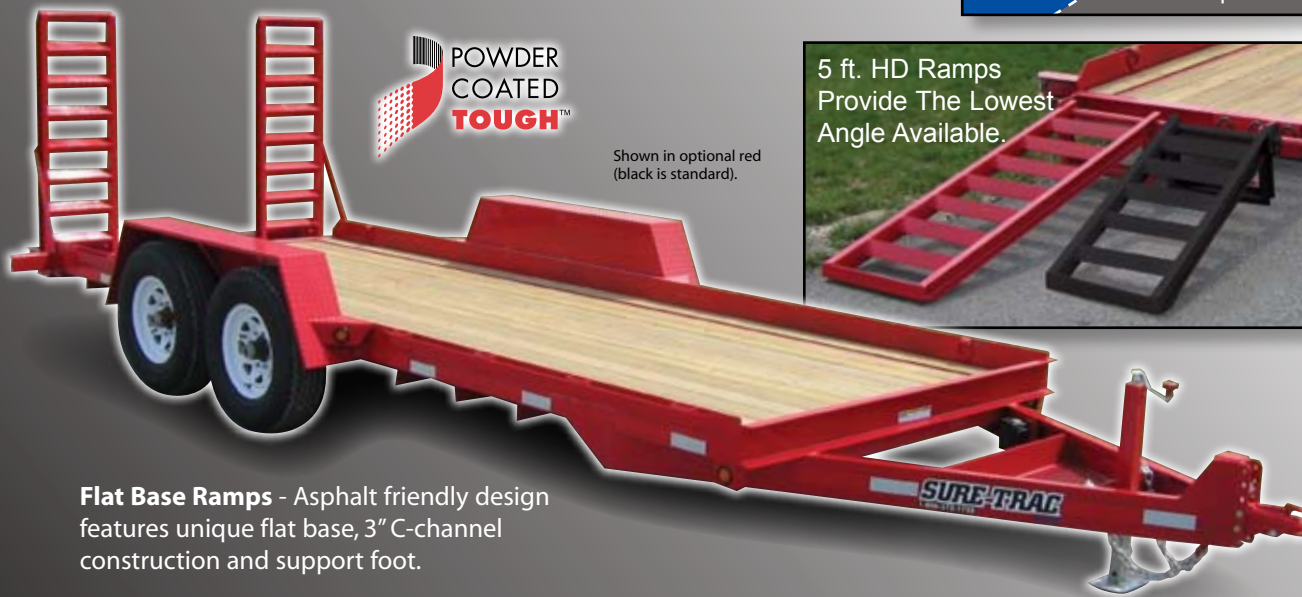

*Actual GVWR listed on spec sheet.

Sure-Trac Skid Steer Trailers - The frame is heavy duty structural 7 x 4 x 3/8 angle with 3 inch C-channel cross members. The attention to detail in design and construction is unmatched with features like stake pockets & rub rail, sealed recessed lights and a recharging circuit on breakaway for commercial vehicle compliance. It all adds up to the best skid steer trailer value you can find.

Check out these other great features:

- True-Trac[™] Alignment
- 12 GA Tread Plate Fenders
- Conduit Protected Wiring
- Gel-Filled Connectors
- Quality Crafted in Indiana
- Superior Customer Service
- Same Day Parts Shipping



Sealed Recessed Lights
- DOT approved lights and reflective tape.



Low Profile Deck - 17 inch floor height for easy loading of equipment.



Full Seam Welds - On all joints ensure structural integrity throughout the frame.



HD 1/4" Stake Pockets
- and full-length rub rail.



Optional 7000 lb. Drop-Leg-Jack
- Comes standard with coupler jack.



HD 5,000 Lbs. D-Rings
- Welded at each corner.



New Tires, Wheels and Axles
- In many states it is illegal to sell new trailers with used running gear.

Optional Adjustable Channel Coupler - Comes standard with 2-5/16 in. stamped coupler.



Powder Coated Finish - A durable high-gloss finish that will last for years.



800-372-1755

LOW PROFILE SKID STEER TRAILERS SPECIFICATIONS				
		10K	12K	14K
GVWR		9990	12000	14000
GAWR		5200	6000	7000
Curb Weight	14	1650	1750	1850
	16	2240	2340	2440
	18	2680	2780	2880
	20	3320	3420	3520
	Payload	14	8340	10250
	16	7750	9660	11560
	18	7310	9229	11120
	20	6670	8580	10480
Max Hitch Weight		1000	1200	1400
Frame		7 X 4 X 3/8 Angle		
Cross Members		3" C-Ch. (16 On-Ctr)		
Tongue		6" C-Channel		
Coupler		2 5/16 A-Frame		
Jack		Coupler Mounted Jack		
Fenders		HD Tread Plate		
Axles		Easy Lube Cambered Brake w/4" Drop		
Suspension		Eye to Eye Spring		
Tires		225/75D15	7.5-16	235/80*16
		(D) Bias	Bias (R)	Radial
		LRD	LRF	LRE
Wheels		6 Lug on 5.5	8 Lug on 6.5	
		16 X 6K, White or Grey, Modular		
Floor		2 X 6 Treated Pine		
Lights		Rubber Mounted/Sealed DOT stop, Tail, Turn, Marking and Clearance.		
Electric Plug		7 Way Round		
Finish		Powder Coated High Gloss		
Length Overall/Flat	14	20'5"/14'		
	16	22'5"/16'		
	18	24'5"/18'		
	20	26'5"/20'		
Bed Width		79-1/4"		
Floor Height		15"	17"	
Coupler Height		17"	19"	
Ramps		3" C-Channel		
OPTIONS				
Spare Tire		Matching Tire and Rim. Also Available U-Bolt Carrier		
Ball Coupler		Pintle Eye or 2-5/16 Adjustable Ball		
Wheel Type		(R) Radial	N/A	
Floor Upgrade		2 X 6 Oak		
Spring		Slipper Spring		
Hitch		Gooseneck Hitch		
Ramp		Spring Assist Ramp		

Table Units: Weights in Lbs., Dimensions as marked. Specifications subject to change without notice.